

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
25 September 2003 (25.09.2003)

PCT

(10) International Publication Number
WO 03/078747 A1(51) International Patent Classification⁷: E03D 9/03, 9/02

[GB/GB]; Lantern Cottage, Liverton, Newton Abbott, Devon TQ12 6HH (GB).

(21) International Application Number: PCT/GB03/01044

(22) International Filing Date: 12 March 2003 (12.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

0205692.7	12 March 2002 (12.03.2002)	GB
0218655.9	10 August 2002 (10.08.2002)	GB

(71) Applicant (for all designated States except US): **ROBERT MCBRIDE LIMITED** [GB/GB]; Middleton Way, Middleton, Manchester M24 4DP (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SMITH, Nigel, Peter**


(74) Agent: **NEWSTEAD, Michael, John**; Page Hargrave, Southgate, Whitefriars, Lewins Mead, Bristol BS1 2NT (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: DISPENSER

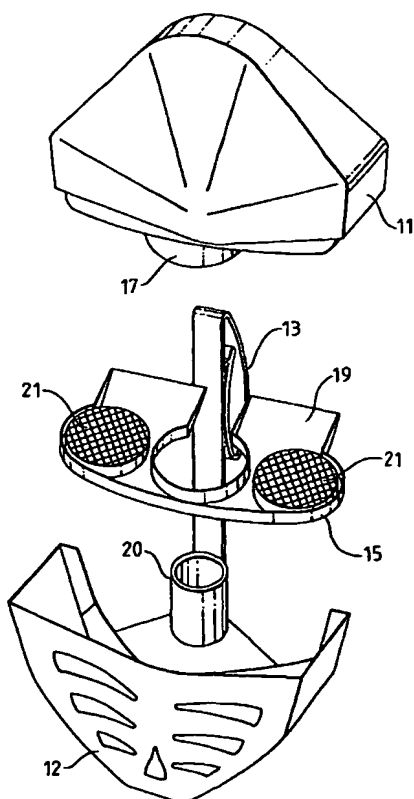

(57) Abstract: The invention provides a adaptation to a rimstick dispenser of the type having a reservoir of active liquid and a flow controller to control the rate at which liquid is dispensed from the reservoir. In accordance with the invention a source of further active substance is provided so as to improve the efficacy of the dispenser, without otherwise affecting the assembly or operation of the dispenser. In one embodiment this source of further active is retained about the outlet neck of the reservoir so as to be sandwiched between the reservoir and the flow controller when the two components are assembled together.